
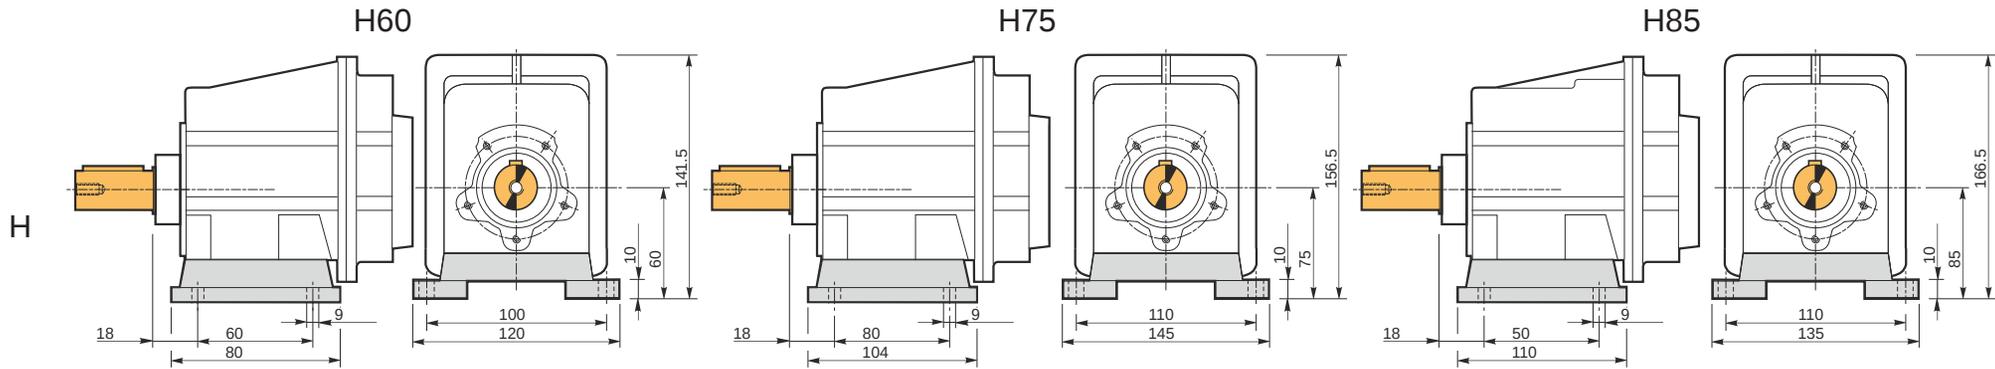
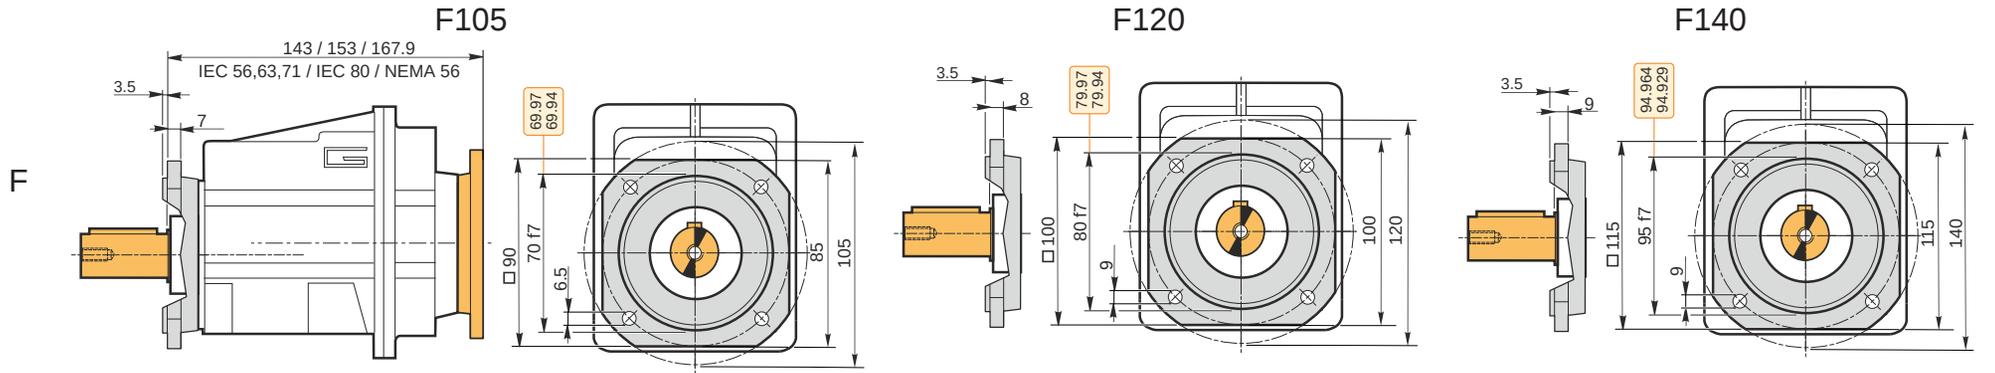



### Alternate Shaft Options

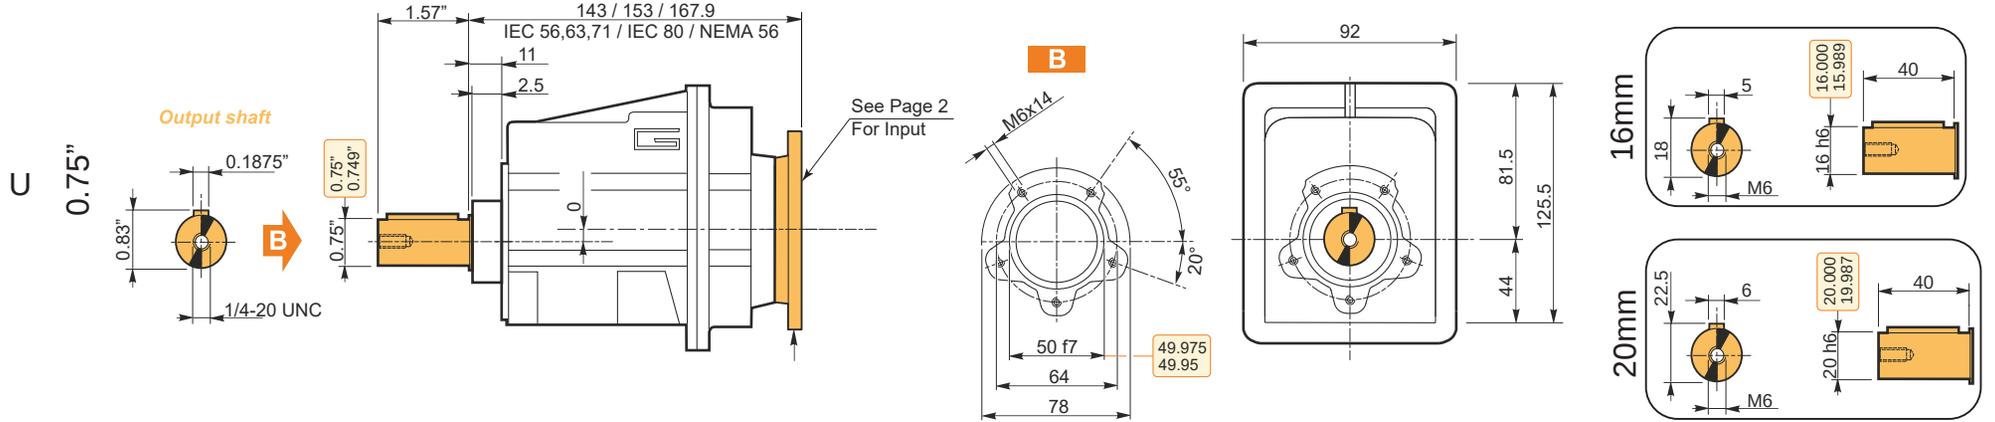

	i	n2 [rpm]	Mn2 [lb-in]	Pn1 [hp]	Motor Speed @ 1,750 RPM	n2 [min-1]	Mn2 [Nm]	Pn1 [kW]	Motor Speed @ 1,750 RPM				
									NEMA		56 C	IEC	
A	5.03	<b>348</b>	354	2.04		<b>348</b>	40	1.50					
B	6.10	<b>287</b>	354	1.68		<b>287</b>	40	1.30					
C	7.49	<b>234</b>	354	1.37		<b>234</b>	40	1.00					
D	8.99	<b>195</b>	442	1.42		<b>195</b>	50	1.10					
E	10.16	<b>172</b>	442	1.26		<b>172</b>	50	0.94					
F	12.07	<b>145</b>	442	1.06		<b>145</b>	50	0.79					
G	13.40	<b>131</b>	619	1.34		<b>131</b>	70	1.00					
H	15.14	<b>116</b>	619	1.18		<b>116</b>	70	0.88					
I	18.17	<b>96.3</b>	619	0.99		<b>96.3</b>	70	0.74					
J	21.58	<b>81.1</b>	619	0.83		<b>81.1</b>	70	0.62					
K	23.51	<b>74.4</b>	619	0.76		<b>74.4</b>	70	0.57					
L	25.10	<b>69.7</b>	619	0.71		<b>69.7</b>	70	0.53					*
M	27.08	<b>64.6</b>	619	0.66		<b>64.6</b>	70	0.59					*
N	32.49	<b>53.9</b>	619	0.55		<b>53.9</b>	70	0.41					*
O	42.04	<b>41.6</b>	619	0.43		<b>41.6</b>	70	0.32					*
P	44.89	<b>39</b>	619	0.40		<b>39</b>	70	0.30			*		*
Q	48.86	<b>35.8</b>	619	0.37		<b>35.8</b>	70	0.27			*		*
R	55.10	<b>31.8</b>	619	0.33		<b>31.8</b>	70	0.24			*		*

Highlighted areas indicate motor inputs available on each size of unit.

\* = The service factor (sf) has to be selected depending on application please contact our Technical Department.

Input Flange		56 C	56 B5	56 B14	63 B5	63 B14	71 B5	71 B14	80 B5	80 B14
		N	4.5"	80	50	95	60	110	70	130
M	5.88"	100	65	115	75	130	85	165	100	
P	6.5"	120	80	140	90	160	105	200	120	
D	0.625"	9		11		14		19		

Order Example: GI-002-H75-A-MF-56C

Type	Size	Stage	Version	Ratio	Output Shaft	Input
GI	Helical-Inline Gearbox	002	U	See Table Above (Please Use Letter)	D16=MD	See Table Above
			F105			
			F120		D20=MF	
			F140			
			H60		D0.75=IA	
			H75			
H85						