
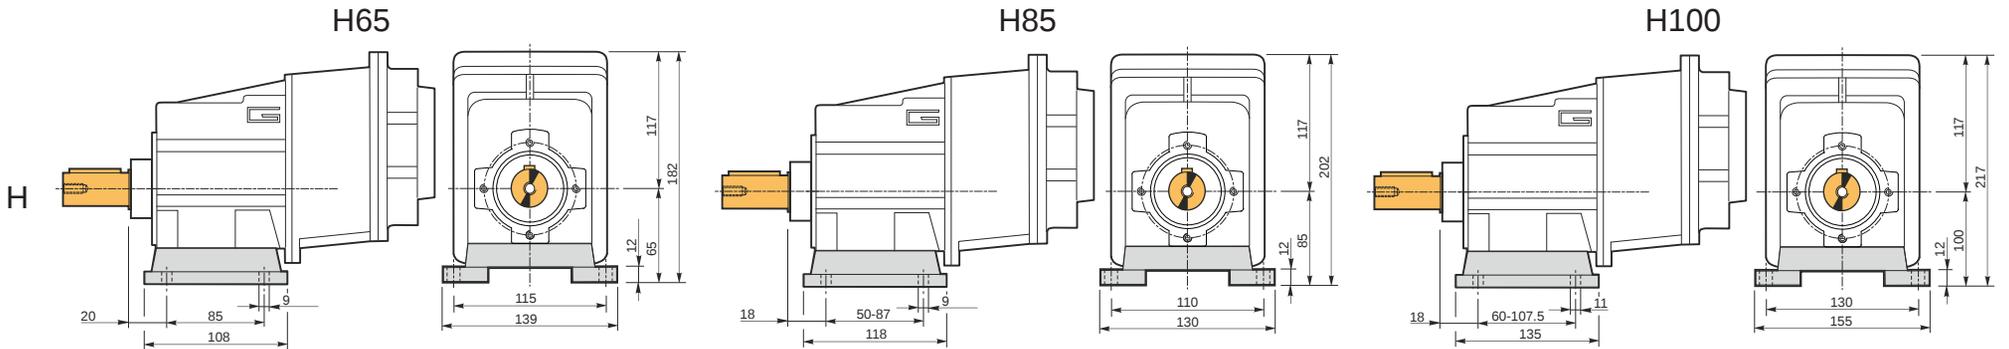
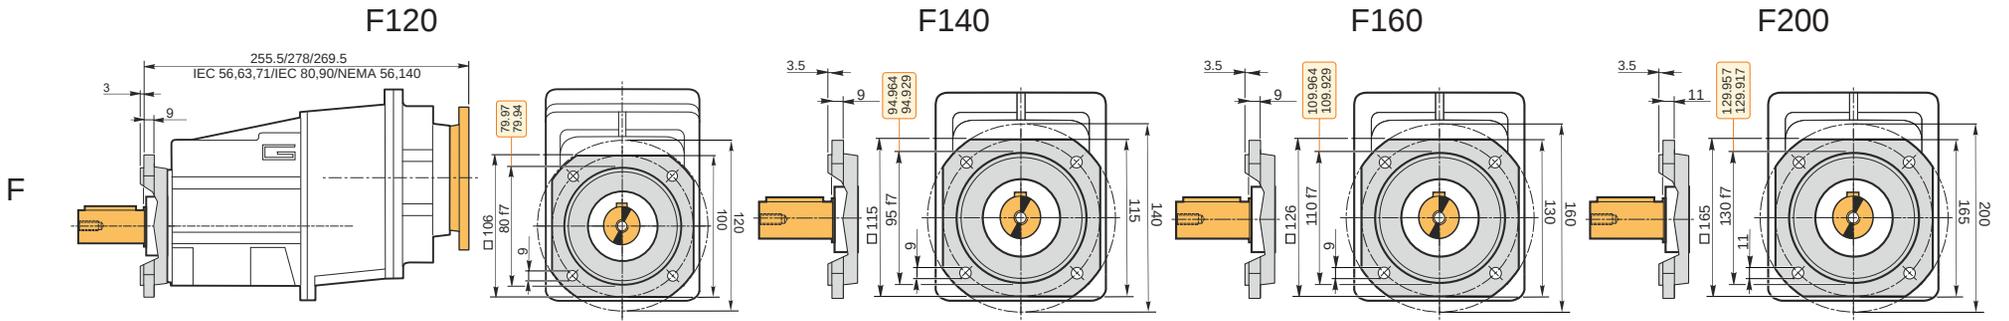



Alternate Shaft Options

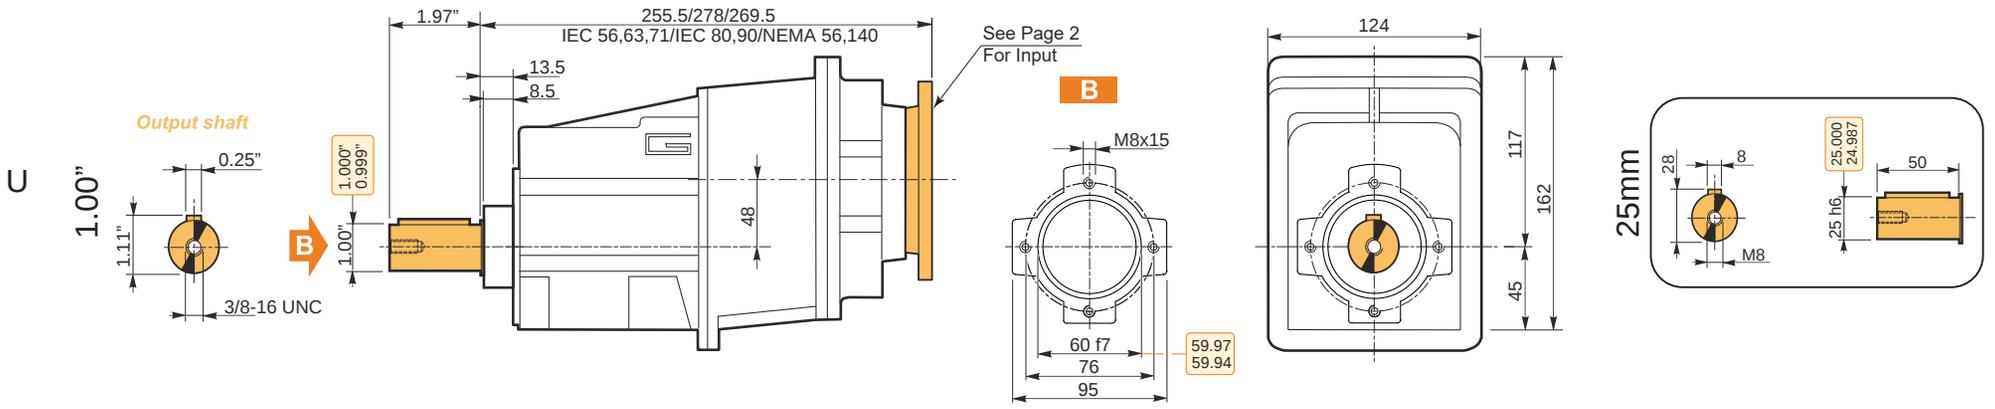

	i	n2 [rpm]	Mn2 [lb-in]	Pn1 [hp]	Motor Speed @ 1,750 RPM		n2 [min-1]	Mn2 [Nm]	Pn1 [kW]	Motor Speed @ 1,750 RPM				
					NEMA					IEC			56 B5/B14	63 B5/B14
A	64.01	27.3	1770	0.82	56 C	*	27.3	200	0.61				*	*
B	76.02	23	1770	0.69	56 C	*	23	200	0.51				*	*
C	90.29	19.4	1770	0.58	56 C	*	19.4	200	0.43				*	*
D	114.46	15.3	1770	0.46	56 C	*	15.3	200	0.34				*	*
E	135.95	12.9	1770	0.38	56 C	*	12.9	200	0.29			*	*	*
F	175.89	9.9	1770	0.30	56 C	*	9.9	200	0.22			*	*	*
G	204.69	8.5	1770	0.26	56 C	*	8.5	200	0.19			*	*	*
H	264.84	6.6	1770	0.20	56 C	*	6.6	200	0.15			*	*	*
I	307.80	5.7	1770	0.17	56 C	*	5.7	200	0.13			*	*	*
J	398.25	4.4	1770	0.13	56 C	*	4.4	200	0.10			*	*	*
K	449.14	3.9	1770	0.12	56 C	*	3.9	200	0.09			*	*	*

Highlighted areas indicate motor inputs available on each size of unit.

* = The service factor (sf) has to be selected depending on application please contact our Technical Department.

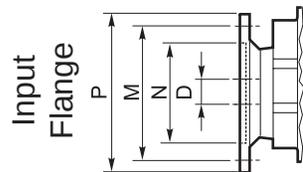

	56 C	140TC	56 B5	56 B14	63 B5	63 B14	71 B5	71 B14	80 B5	80 B14	90 B5	90 B14
N	4.5"		80	50	95	60	110	70	130	80	130	95
M	5.88"		100	65	115	75	130	85	165	100	165	115
P	6.5"		120	80	140	90	160	105	200	120	200	140
D	0.625"	0.875"	9		11		14		19		24	

Order Example: GI-023-U-A-IB-56C

Type	Size	Stage	Version	Ratio	Output Shaft	Input
GI	Helical-Inline Gearbox	023	U	See Table Above (Please Use Letter)	D25=MG	See Table Above
			F120			
			F140			
			F160			
			F200			
			H65			
			H85			
H100						
	Helical-Inline Gearmotor				D1.00=IB	