
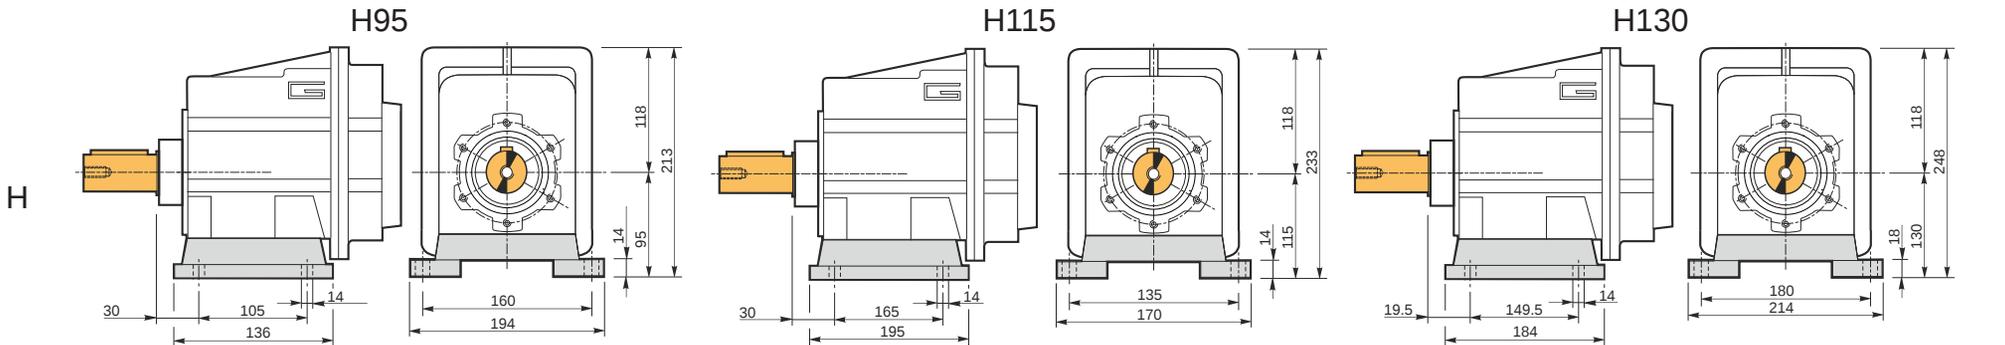
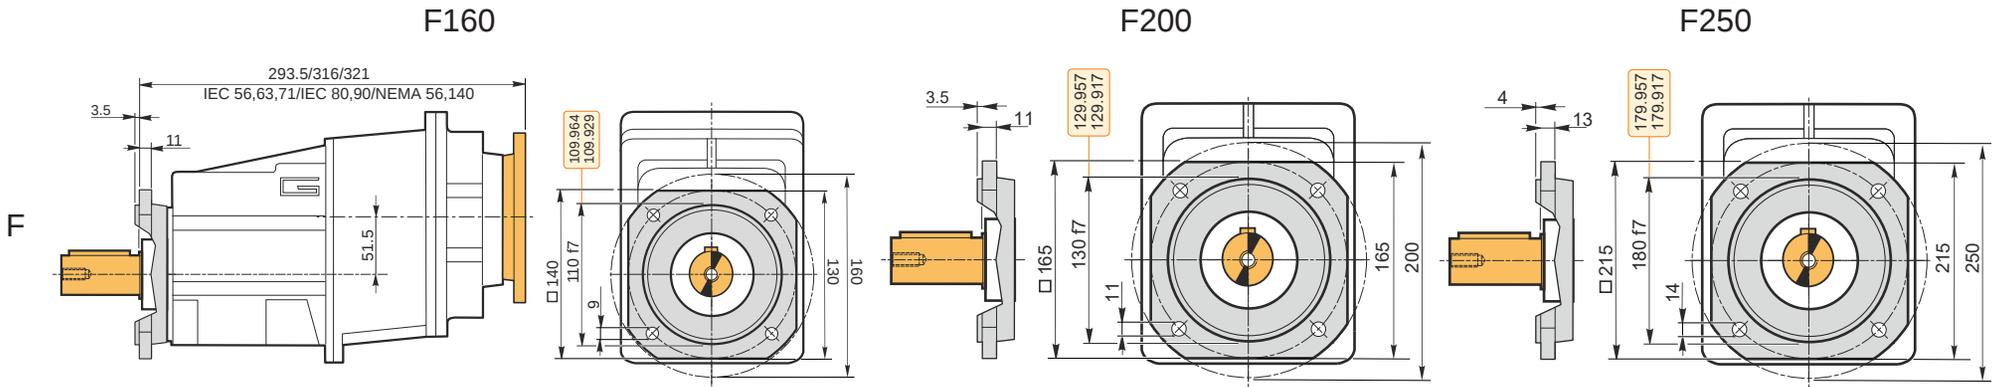



Alternate Shaft Options

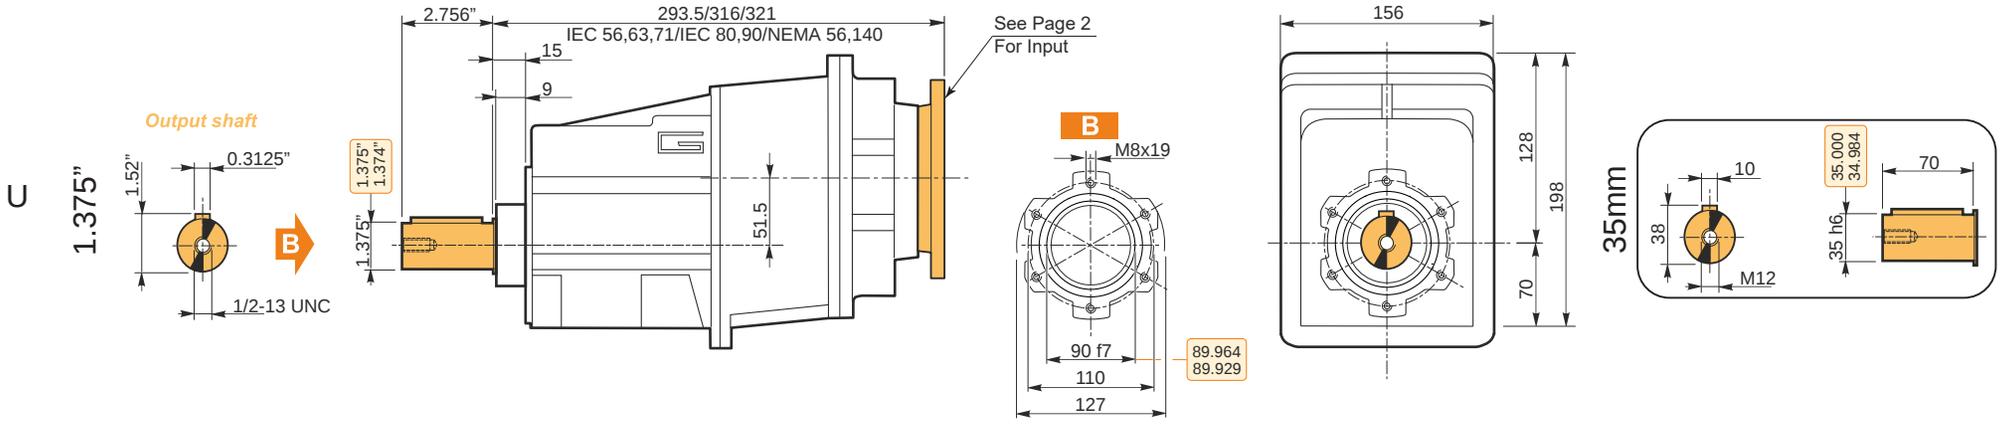

	i	n2 [rpm]	Mn2 [lb-in]	Pn1 [hp]	Motor Speed @ 1,750 RPM			Motor Speed @ 1,750 RPM					
					56 C	140 TC	IEC	56 B5/B14	63 B5/B14	71 B5/B14	80 B5/B14	90 B5/B14	
		NEMA											
A	72.83	24	4425	1.79			24	500	1.34				
B	97.45	18	4425	1.34			18	500	1.00				*
C	115.74	15.1	4425	1.13			15.1	500	0.84				*
D	140.81	12.4	4425	0.93			12.4	500	0.69				*
E	174.26	10	4425	0.75		*	10	500	0.58			*	*
F	225.47	7.8	4425	0.58		*	7.8	500	0.43			*	*
G	262.05	6.7	4425	0.50		*	6.7	500	0.37			*	*
H	325.79	5.4	4425	0.40		*	5.4	500	0.30			*	*
I	378.64	4.6	4425	0.35		*	4.6	500	0.26			*	*
J	427.03	4.1	4425	0.31		*	4.1	500	0.23			*	*

Highlighted areas indicate motor inputs available on each size of unit.

* = The service factor (sf) has to be selected depending on application please contact our Technical Department.

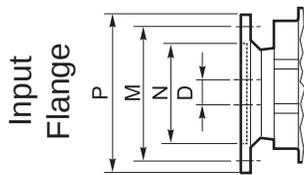

	56 C	140TC	56 B5	56 B14	63 B5	63 B14	71 B5	71 B14	80 B5	80 B14	90 B5	90 B14
N	4.5"		80	50	95	60	110	70	130	80	130	95
M	5.88"		100	65	115	75	130	85	165	100	165	115
P	6.5"		120	80	140	90	160	105	200	120	200	140
D	0.625"	0.875	9		11		14		19		24	

Order Example: GI-043-U-A-ID-56C

Type	Size	Stage	Version	Ratio	Output Shaft	Input
GI	Helical-Inline Gearbox	043	U	See Table Above (Please Use Letter)	D35=MJ	See Table Above
			F160			
	F200		D1.375=IE			
	F250					
	H95					
	H115					
Helical-Inline Gearmotor	H130					