
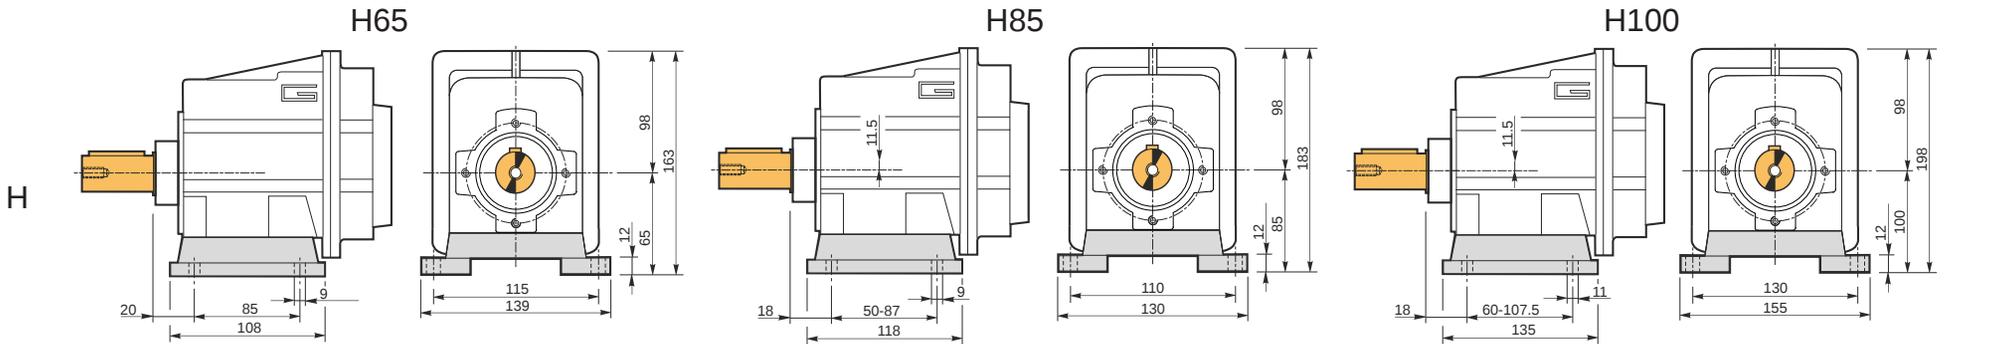
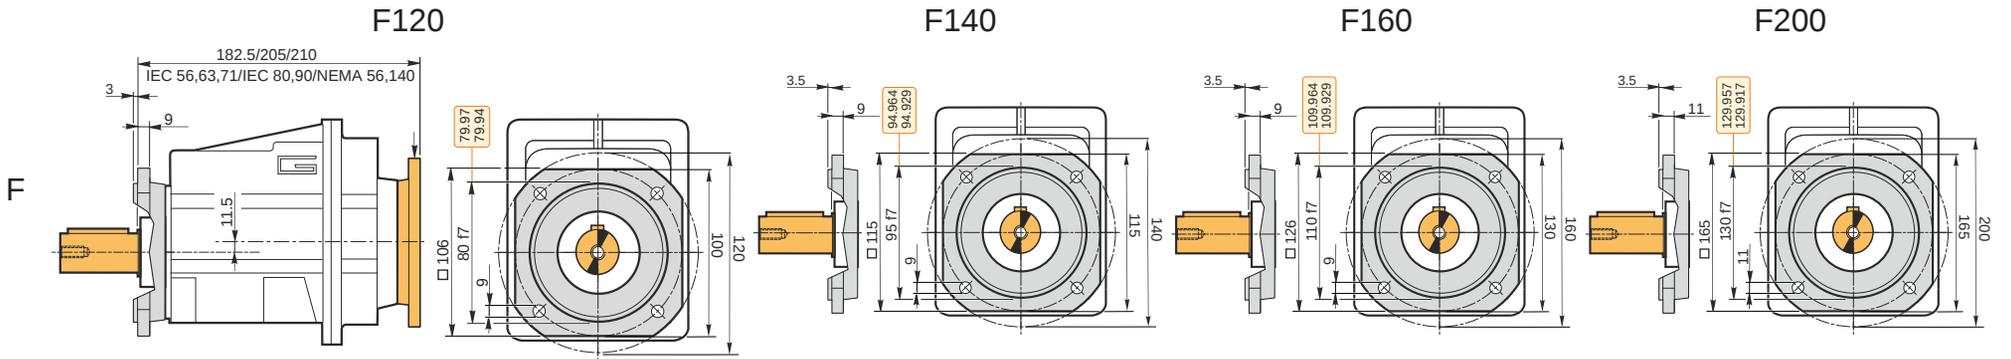



Alternate Shaft Options

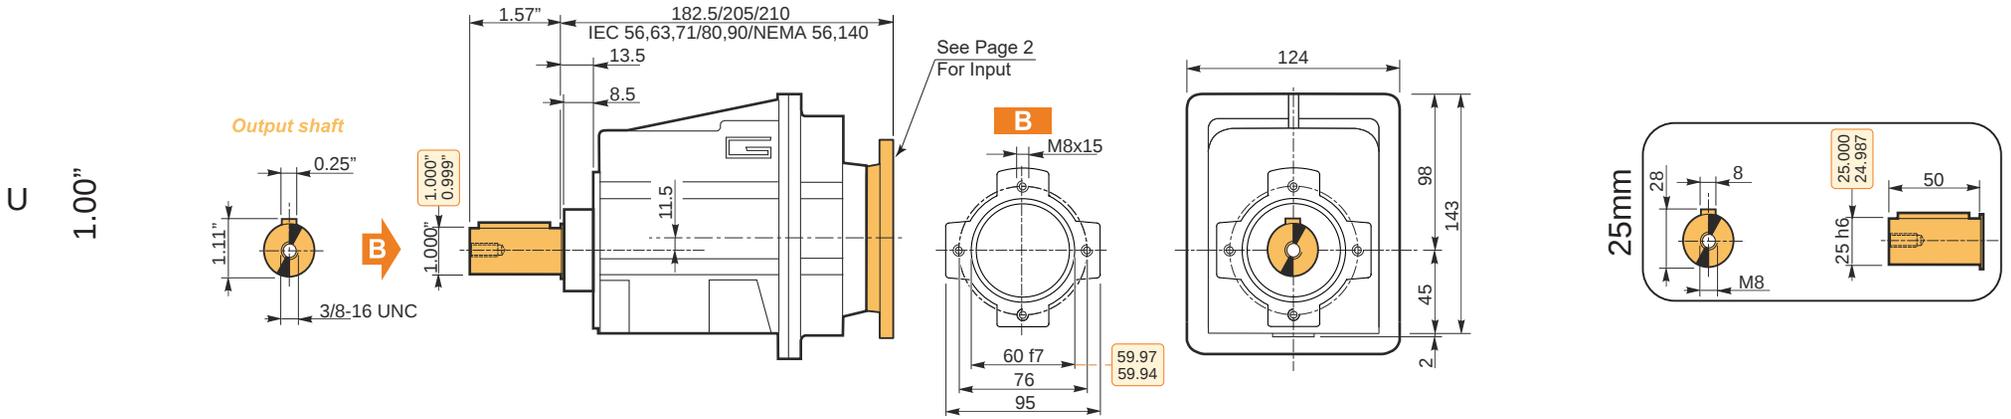

	i	n2 [rpm]	Mn2 [lb-in]	Pn1 [hp]	Motor Speed @ 1,750 RPM		n2 [min-1]	Mn2 [Nm]	Pn1 [kW]	Motor Speed @ 1,750 RPM					
					56 C	140 TC				IEC		56 B5/B14	63 B5/B14	71 B5/B14	80 B5/B14
A	3.66	479	885	7.00			479	100	5.20						
B	4.43	395	885	5.77			395	100	4.30						
C	5.45	321	885	4.70			321	100	3.50						
D	7.39	237	1062	4.16			237	120	3.10						
E	8.78	199	1062	3.50			199	120	2.60						
F	9.93	176	1062	3.09			176	120	2.30						
G	11.01	159	1770	4.65			159	200	3.50						
H	12.05	145	1770	4.25			145	200	3.20						
I	13.21	132	1416	3.10			132	160	2.30						
J	14.81	118	1770	3.46			118	200	2.60						
K	17.10	102	1150	1.95			102	130	1.50						
L	20.08	87.1	1770	2.55			87.1	200	1.90						
M	23.85	73.4	1770	2.15			73.4	200	1.60						
N	29.93	58.5	1770	1.71			58.5	200	1.30						
O	35.91	48.7	1770	1.43			48.7	200	1.10						*
P	46.46	37.7	1770	1.10			37.7	200	0.82						*
Q	49.61	35.3	1770	1.03			35.3	200	0.77						*
R	54.00	32.4	1770	0.95			32.4	200	0.71						*
S	60.90	28.7	1770	0.84			28.7	200	0.63					*	*

Highlighted areas indicate motor inputs available on each size of unit.

* = The service factor (sf) has to be selected depending on application please contact our Technical Department.

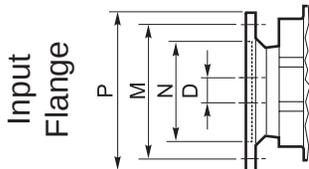

	56 C	140TC	56 B5	56 B14	63 B5	63 B14	71 B5	71 B14	80 B5	80 B14	90 B5	90 B14
N	4.5"		80	50	95	60	110	70	130	80	130	95
M	5.88"		100	65	115	75	130	85	165	100	165	115
P	6.5"		120	80	140	90	160	105	200	120	200	140
D	0.625"	0.875"	9		11		14		19		24	

Order Example: GI-022-U-A-IB-56C

Type	Size	Stage	Version	Ratio	Output Shaft	Input
GI	Helical-Inline Gearbox	022	U	See Table Above (Please Use Letter)	D25=MG	See Table Above
			F120			
F140						
F160						
F200						
H65						
H85						
Helical-Inline Gearmotor			H100		D1.00=IB	